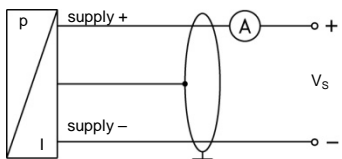
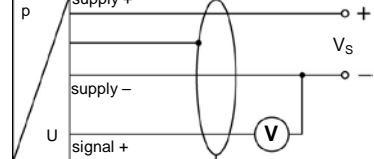







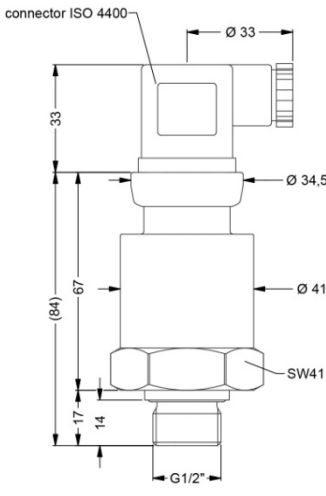
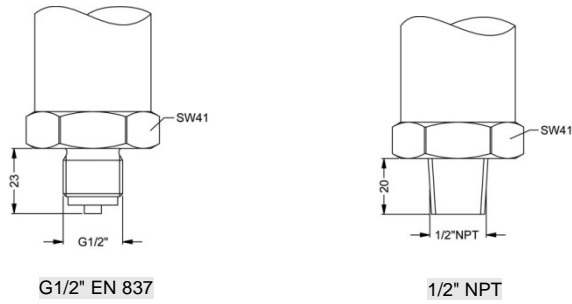


Wiring diagram					
<p>2-wire-system (current)</p> 			<p>3-wire-system (current / voltage)</p> 		
Pin configuration					
Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal +	3	1	3	OUT +	gn (green)
Shield	ground contact	5	4		ye/gn (yellow / green)
Electrical connections (dimensions in mm)					
 <p>ISO 4400 (IP 65)</p>		 <p>Binder series 723 (IP 67)</p>		 <p>M12x1 4-pin (IP 67)</p>	
 <p>cable outlet with PVC-cable (IP 67)²</p>		 <p>cable outlet, cable with ventilation tube (IP 68)³</p>		 <p>compact field housing (IP 67)</p>	
<p>² standard: 2 m PVC-cable without ventilation tube (permissible temperature: -5 ... 70°C), optional cable with ventilation tube</p> <p>³ different cable types and lengths available, permissible temperature depends on kind of cable</p>					
Dimensions (in mm)					
<p>standard</p>  <p>G1/2" DIN 3852</p>			<p>option</p>  <p>G1/2" EN 837</p> <p>1/2" NPT</p>		

This data sheet contains product specification, properties are not guaranteed. Subject to change with notice.

Please visit our website: www.mctram.com